STRONG
DIGITAL TV

DVB
Digital Video Broadcasting

Digital Satellite and Terrestrial Receiver SRT 5246

Faster and as flexible as before?

The STRONG SRT 5246 will do so. The next generation of Digital Satellite and Terrestrial Receiver brings 30% more speed to your home. You will enjoy high speed zapping between all terrestrial and satellite channels and a much faster on-screen TV Programme Guide. Best audio and video quality and features, such as 4 000 channels memory capacity, 4 favourite lists, 8 timer functions, mosaic of 4 or 9 TV channels in overview, software update via satellite and many others more are must-haves. Simply the best technology in top design for your Home Entertainment.

- For all* digital Free-To-Air TV and Radio programmes via terrestrial antenna and satellite
- 4 000 channels memory capacity
- 4 Favourite lists for both TV and Radio programmes
- Audio and Video in DVD quality
- Electronic TV Programme Guide
- 8 timer functions
- Mosaic function: 4 or 9 TV channels in overview
- Multi-lingual on screen menu (OSD)
- Automatic and manual channel scan options
- Comfortable sorting of TV or Radio programmes
- Multi-lingual Audio track, Subtitling and Teletext support
- Parental lock function
- High speed channel zapping
- 3 Games (Boxman, Tetris, Snake)
- Setup support for first time installation
- With built-in UHF modulator
- Separate power switch

* Subject to your local signal conditions

Digital Satellite | Digital Terrestrial | 4000 Channels | 4 Favourite lists | Digital Audio | TV Info | 8 Timers | Man./Auto Search | Subtitles | Tele Text | Wizard | UHF Modulator | OTA

www.strong.tv

STRONG
DIGITAL TV

DVB
Digital Video Broadcasting

Digital Satellite and Terrestrial Receiver SRT 5246

- For all* digital Free-To-Air TV and Radio programmes via satellite and terrestrial indoor or outdoor antenna
- 4 000 channels memory capacity for 64 satellites and terrestrial programmes
- 4 Favourite lists for TV-and Radio programme
- Display showing channel number or time
- Setup support for first time installation
- Mosaic function: 4 or 9 TV channels in overview
- Audio- and Video in DVD quality
- Advanced Zoom functions for TV pictures
- Electronic TV Information (EPG) for present/following on screen programme information for up to 7 days
- Parental lock function for menu and selectable per channel
- 8 timer functions
- Fast channel zapping: sorting by first letter of channel name
- Digital sound through coaxial output (S/PDIF)
- Multi-lingual audio track and subtitles support
- Teletext via TV and receiver
- Multi-lingual on screen menu (OSD) support
- Edit functions for TV or Radio programme name and satellite name
- Future-proof: Software update via satellite (OTA)
- Signal strength and quality bar for digital transponders
- Automatic and manual channel scan options
- Power on with last viewed or defined channel
- Set-up support for first time installation
- Supports DiSEqC 1.0, 1.1, 1.2 and GOTO X
- 3 Games (Boxman, Tetris, Snake)
- User-friendly remote control with coloured function buttons
- Low power consumption
- With built-in UHF modulator
- Separate power switch
- **Connections:** SAT IN and SAT OUT for satellite, ANT IN and LOOP OUT for terrestrial, LOOP IN TO TV for Modulator, 1 Scart TV (RGB/CVBS), 1 Scart VCR (CVBS), S/PDIF, 3 RCA (Video, Audio Left and Right), Serial Port RS-232, power switch
- **Accessories:** User Manual, Remote control, 2 x Batteries (AAA)

* Subject to your local signal conditions

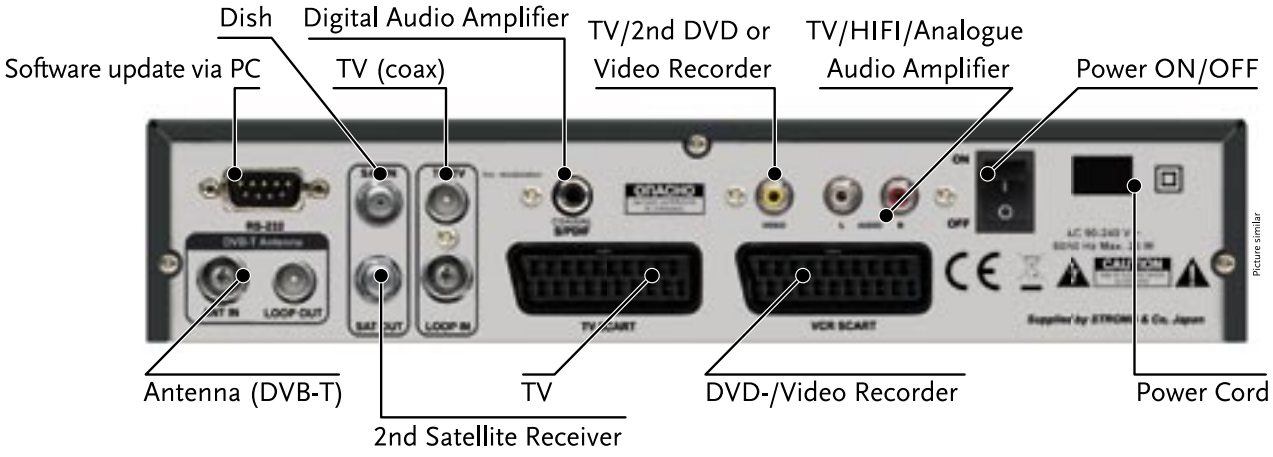

Terrestrial Demodulator
Modulation: COFDM
Constellation: QPSK, 16 QAM, 64 QAM
Transmission mode: 2K, 8K
Guard Interval: 1/4, 1/8, 1/16, 1/32
Code Rate: 1/2, 2/3, 3/4, 5/6, 7/8

Satellite Demodulator
Modulation: QPSK
Input Symbol Rate: 2 ~ 45 Ms/s
SCPC & MCPC signals from C & KU band satellites

Video Decoder
Profile level: MPEG-2 MP@ML
Input Rate: Max. 100 Mbits/s
Video Resolution: 720 x 576 (PAL),
720 x 480 (NTSC)
Aspect Ratio: 4:3, 16:9

Audio Decoder
ISO/IEC 11172 LAYER I&II
Sampling rate: 32, 44.1, 48 kHz
Audio modes: Stereo, Mono
DVB-T Tuner
Connector type: IEC 169-2
Input Frequency Range:
174 ~ 862 MHz (VHF~UHF)
RF Input Level: -78 ~ -20 dBmV
Antenna supply: 5 V DC, Max. 50 mA, Overload protected

DVB-S Tuner
Connector type: IEC 169 ~ 24
Input Frequency Range: 950 ~ 2150 MHz
RF Input Level: -25 ~ -65 dBm
LNB Power: 13.5/18 V DC (± 5 %),
Max. 400 mA, Overload protected
DiSEqC 1.0, 1.1, 1.2 and GOTO X

System and Memory
Flash Memory: 2 MBytes
SDRAM: 16 MBytes

Connectors
DVB-T ANT IN
DVB-T LOOP OUT
SAT IN; SAT OUT
RF Modulator LOOP IN
RF Modulator OUT (TO TV)
2 SCARTS TV (RGB, CVBS) / VCR (CVBS)
3 RCA (Video, Audio L&R)
S/PDIF: coaxial output
Data Interface – serial port: RS-232,
9-Pin D-Sub Male type
Separate power switch

General Data
Input Voltage Range: 90 - 240 V AC 50/60 Hz
Power consumption: max 25 W
Power consumption in standby: max. 7 W
Operating Temperature: +0 ~ 40 °C
Storage Temperature: -30 ~ 80 °C
Operating Humidity Range: 10 ~ 85%,
RH, Non-condensing
Size (W x D x H) in mm: 280 x 235 x 60
Weight: 1.7 kg
EAN code: 8717185443837

Technical alterations reserved 12/2008

HOTLINE
0180 500 75 43*
* €0.14/Min. from German wired line
0820 400 150*
* €0.12/Min. from Austrian wired line
per January 2007

Subject to alterations. In consequence of continuous research and development technical specifications, design and appearance of products may change. ASTRA is a registered trade mark of SES ASTRA, Eutelsat and HOT BIRD are registered trade marks of Eutelsat Communications, CryptoWorks is a trademark of Irdeto Access B.V., all other product names are trademarks or registered trademarks of their respective owners.
© STRONG 2008. All rights reserved. 12/2008